

Optical Distance Sensor

GEBE®

**Elektronik und
Feinwerktechnik GmbH**

Modules and devices for input,
analysis, display and printing of
analog and digital data.

GSE-NPE-004

**Operating Power: 8 – 40 VDC
Automatic PowerDown**

GeBE Document-No.:

TD-E-721-V1.0

Article No.: 13409


Status: 07.05.2012

Printed: 07.05.2012

German: TD-D-720



Example

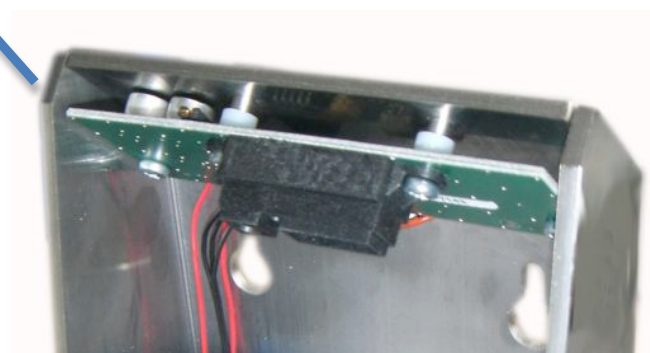

Technical Datasheet

The GeBE logo is a registered trademark of GeBE Elektronik und Feinwerktechnik GmbH.

All other brands named in this brochure are properties of the respective companies.

Errors and changes reserved. The technical data given are non-committal information and does not represent any assurance of certain features. Our terms of payment and delivery apply.

Copyright © 2012 GeBE Elektronik und Feinwerktechnik GmbH. All rights reserved.

GeBE Elektronik und Feinwerktechnik GmbH

Beethovenstr. 15 • D-82110 Germering • Germany • www.gebe.net

Telefon: +49 (0) 89/894141-31 • Fax: +49 (0) 89/8402168 • email: sales.ef@gebe.net


Optical Distance Sensor GSE-NPE-004

Description

The GeBE GSE-NPE-004 is a digital distance sensor on optical basis. The measuring signal is connected to the NPE (NearPaperEnd) input of a GeBE printer. Only parameter changing in the firmware settings are required for using the GSE-NPE-004 sensor.

Measuring range

The sensor uses the triangle measuring method and detects distances of 4 – 30 cm from a paper surface. Accuracy: 1 mm.

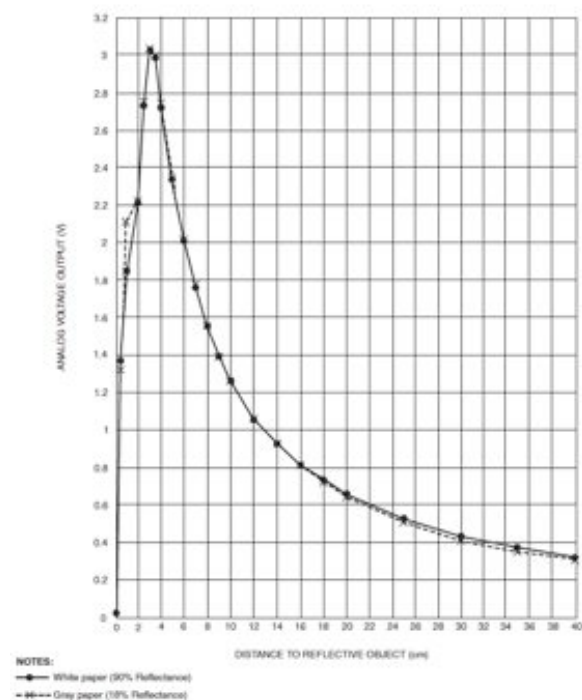

Distance calibration

The distance signal (volt) is a 8 bit digital value, which will be output from the printer interface. The volt signal has to be calibrated once (volt-cm) provided by the customer.


Power management

When switching off the printer, the sensor automatically starts the power down mode.

Influence resistant

The speciality of the GSE-NPE-004 sensor is its simple operation just using the power supply and the output signal. No complex clock signal has to be generated.

The evaluation electronics detects the distance and outputs an analog signal. The measurement is nearly unaffected by glossy or coloured paper.

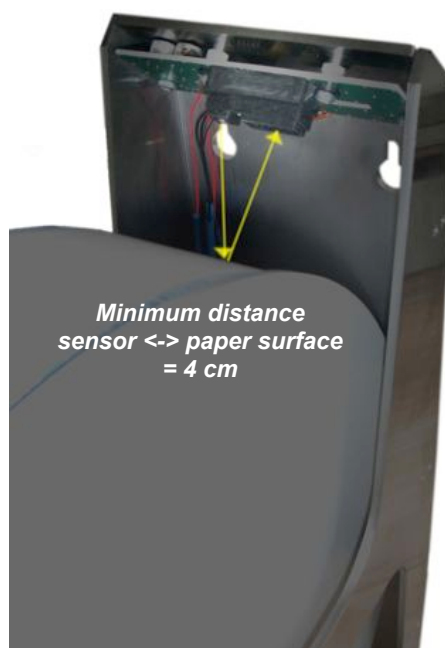

Messaging at paper end

Nevertheless using the NPE interface for the distance sensor, the NPE functionality persists. The threshold level for a NPE message will be set via parameter 35.

Technical Data:

	unit	range	remarks
Type		digital, optical	
Temperature range	°C	-10°C to +60°C	
Measuring range	cm	4 - 30	
Operating power	V	8 - 40 VDC	
Space requirement	mm	90 x 32	length x width
	mm	22,1	height: top side + bottom side + board thickness
Boreholes	mm	Ø 3.2	

Connections:

