

Fujitsu Takamisawa FID-Mouse

Pointing device for presentors




Description



The FID Mouse is outstanding suitable for presentations. The very light mouse can be held well in the hand. The mouse pointer is moved by the thumb. The mouse does not need to be moved on a surface during the operation.

Because of its small size the mouse can inconspicuously held in the hand.

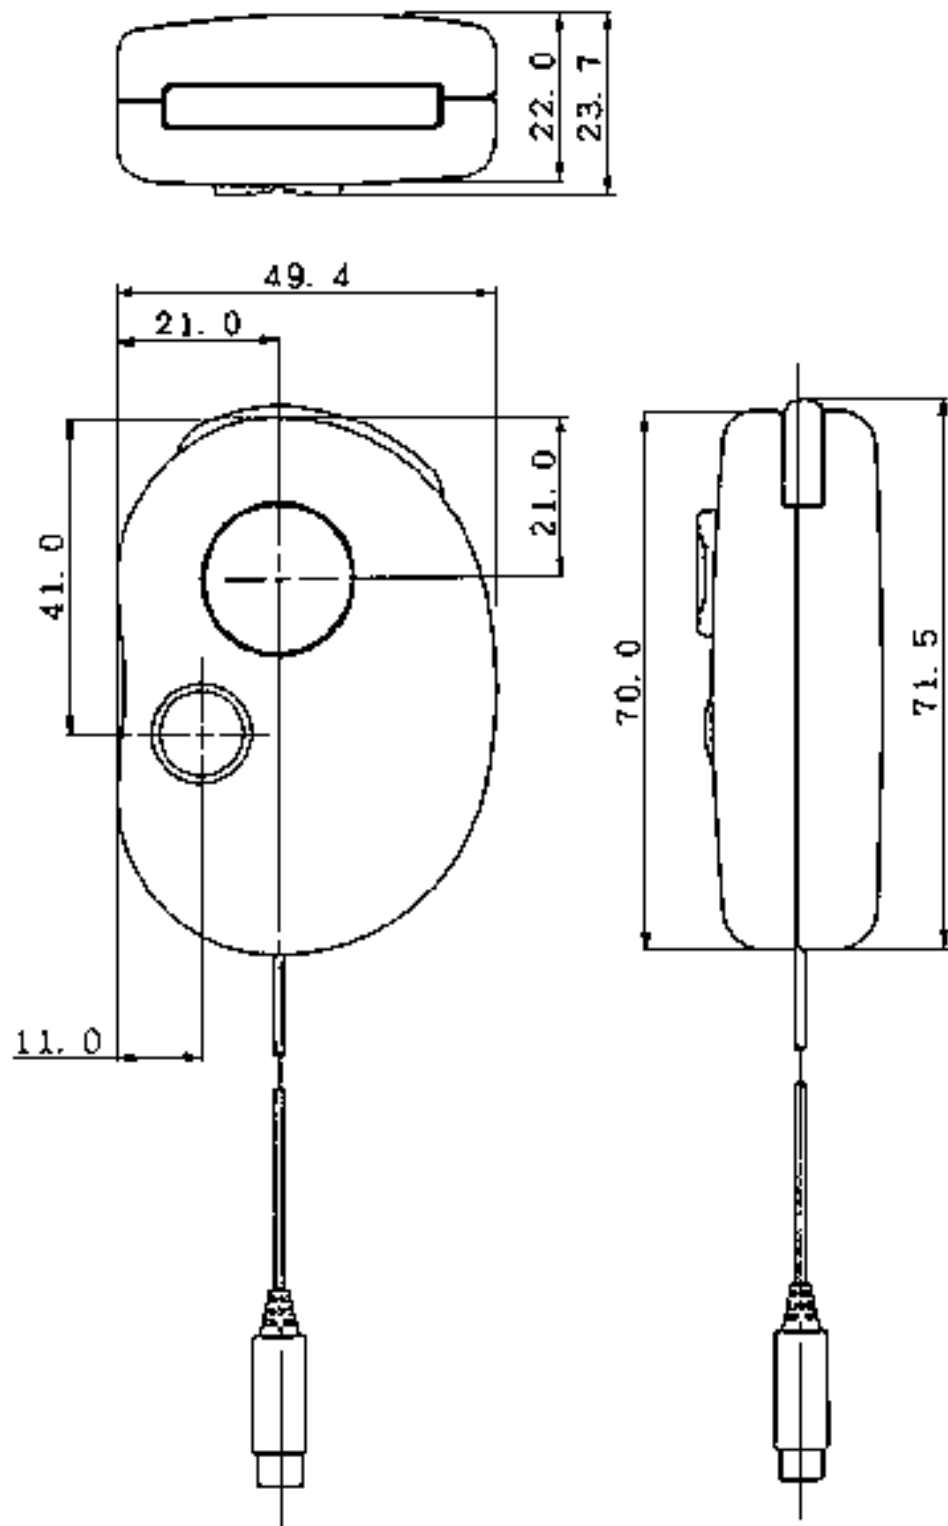

Specification**Mechanical data**

Dimensions:	50 or 50 or 50 x 72 or x 72 or x 72 x 24 or x 24 or x 24 mm
Weight:	0,03 kg or 0,03 kg or 0,03 kg
Housing:	Plastic
Color:	yellow or green or blue
Cable Length:	170 cm or 170 cm or 170 cm

Keys

Number of Keys:	2 or 2 or 2
Operational Life:	1 mio. keystrokes min. or 1 mio. keystrokes min. or 1 mio. keystrokes min.
Actuation Force:	0,2 or 0,2 or 0,2 N

Electric Data

Interface:	PS/2
Operating Voltage:	5 or 5 or 5 ± 0,25 V or ± 0,25 V or ± 0,25 V
Operating Current:	50 or 50 or 50 mA

Environment

Operating Temperature:	from 0 °C or from 0 °C or from 0 °C to +40 °C or to 40 °C or to +40 °C
Storage Temperature:	from -15 °C or from -15 °C or from -15 °C to +60 °C or to 60 °C or to +60 °C
Humidity:	90% RH at 40°C

Order Information

Order No.	Article	
TE1029	FID-824-502-gelb	yellow
TE1030	FID-824-503-grün	green
TE1031	FID-824-504-blau	blue

Accessories

Order No.	Article	
ZK1232	PS/2-3M-gerade 	PS/2 interface, 3m, stright
ZK1231	PS/2-5M-gerade 	PS/2 interface, 5m, stright

ZK1233	PS/2-10M-gerade	PS/2 interface, 10m, stright
		

sales@www.tastaturen.com **Anrufen:** (0 89) 89 43 99-0 **Faxen:** (0 89) 89 43 99-11