

KFT-104/105 with 50mm Trackball

Foil covered keyboard with 105 short travel keys and integrated touchpad or trackball, IP65 from front side



Description

Applications:


The front plate version of the KFT-104/105 compactly series is suitable particularly for the application in switchboards or control terminals within the areas automatic production, chemistry, laboratory and medical technology. Also in the environment of information systems with a space-saving and waterproof keyboard and mouse input for the front-lateral installation, the keyboard is high applicable.

Characteristics:

As frontpanel version this keyboard is IP65 / NEMA4 in standard version and IP68 with optical [Trackball](#) water and dust proof. It can easily be mounted into existing front plates or housings due to the studs at the rear of the keyboard.

The German and US layouts are standard. Other versions, as well as customized adjustments are available on request.

You can get further information on this and all other keyboards of this series on the [main page of the KFT-104/105 series](#)

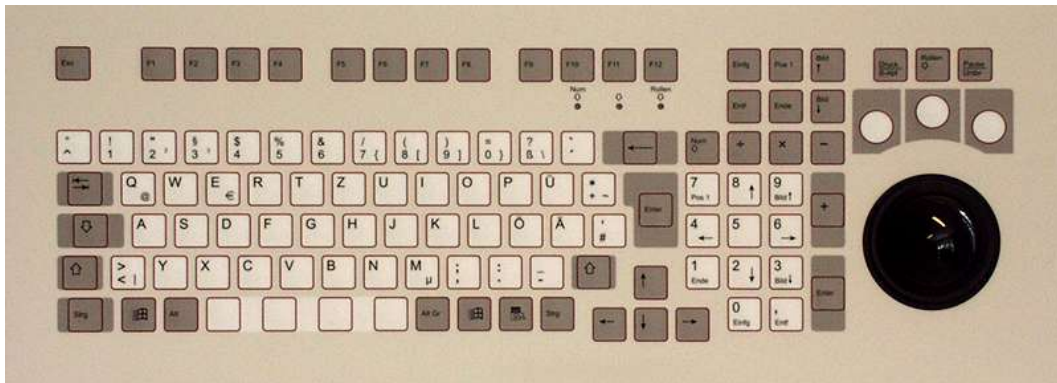

Specification**Mechanical data**

Dimensions:	482,6 x 177,8 x 50 mm
Degree of Protection:	IP65
Housing:	Polyester
Cable Length:	180 cm

Keys

Key Technology:	OMRON Keys
Number of Keys:	105 or 104
Keyboard Layout:	German
Operational Life:	6 mio. keystrokes min.
Actuation Force:	0,4 N
Stroke Travel:	2,6 mm
Key Legend:	silk screen

Electric Data

Interface:	(with adapter PS/2)
Additional Interface:	for mouse PS/2

Environment

Operating Temperature: from 0 °C to +50 °C

Order No.	Article	
KF1249	KFT-105-FT-50-PS2-Ger	2xPS/2 interface, german layout
KF1250	KFT-105-FT-50-PS2-US	2xPS/2 interface, US layout
KF1266	KFT-105-FT-Optisch-50-PS2-Ger	2xPS/2 interface, german layout IP68
KF1267	KFT-105-FT-Optisch-50-PS2-US	2xPS/2 interface, us layout IP68

Accessories

Order No.	Article	
ZK1343	ZK-2-USB	

sales@www.tastaturen.com Anrufen: (0 89) 89 43 99-0 Faxen: (0 89) 89 43 99-11