

## KRG-108-PS/2-Ger

Rubber keyboard with integrated mouse  
in a plastic housing




### Description

#### Specials:

- In its durable and good-looking housing this keyboard has a MF2-layout.
- The tactile feedback allows a comfortable typing.
- With its integrated pointing device it offers a really high using comfort in a very compact way.
- The operation temperature has an extremely wide range of between -20 and +80°C.
- With its degree of protection (IP68) it is excellent protected against water and dust.
- There also is a [USB](#)-version available.

#### Application fields:

This keyboard is the ideal one for industrial areas

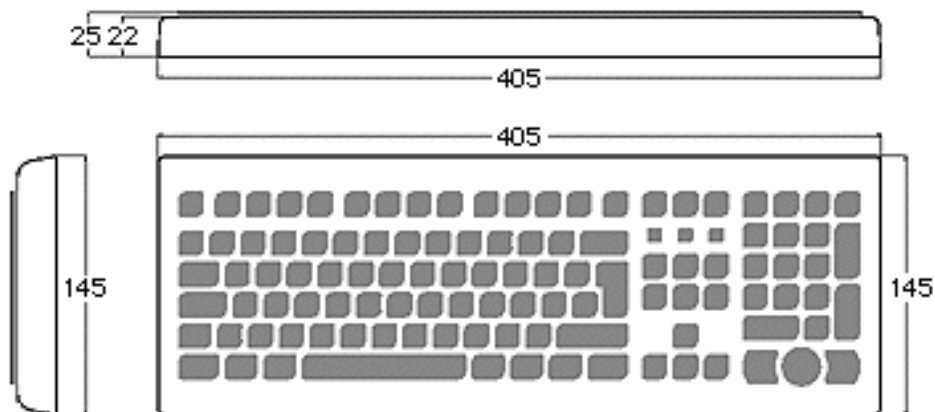

**Specification****Mechanical data**

Dimensions:	405 x 145 x 25 mm
Weight:	1,3 kg
Degree of Protection:	IP65 on front
Housing:	Plastic
Color:	black
Cable Length:	180 cm

**Keys**

Key Technology:	conductiv rubber
Number of Keys:	108
Keyboard Layout:	German
Operational Life:	10 mio. keystrokes min.
Actuation Force:	1,5 N
Stroke Travel:	1,8 mm
Key Legend:	silk screen

**Electric Data**

Interface:	<a href="#">PS/2</a>
Additional Interface:	for mouse PS/2
Operating Voltage:	5 V
Operating Current:	300 mA

**Environment**

Operating Temperature:	from -20 °C to +80 °C
Storage Temperature:	from -40 °C to +80 °C

Order No.	Article	
KR1142	KRG-108-PS/2-Ger	2x PS/2 interface, german layout
KR1143	KRG-108-PS/2-US	2x PS/2 interface, US layout
KR1145	KRG-108-USB-Ger	2x USB interface, german layout

**sales@www.tastaturen.com Anrufen: (0 89) 89 43 99-0 Faxen: (0 89) 89 43 99-11**