


KVD-30-Front Plate

Stainless steel keyboard with long-travel keys integrated into a front plate.

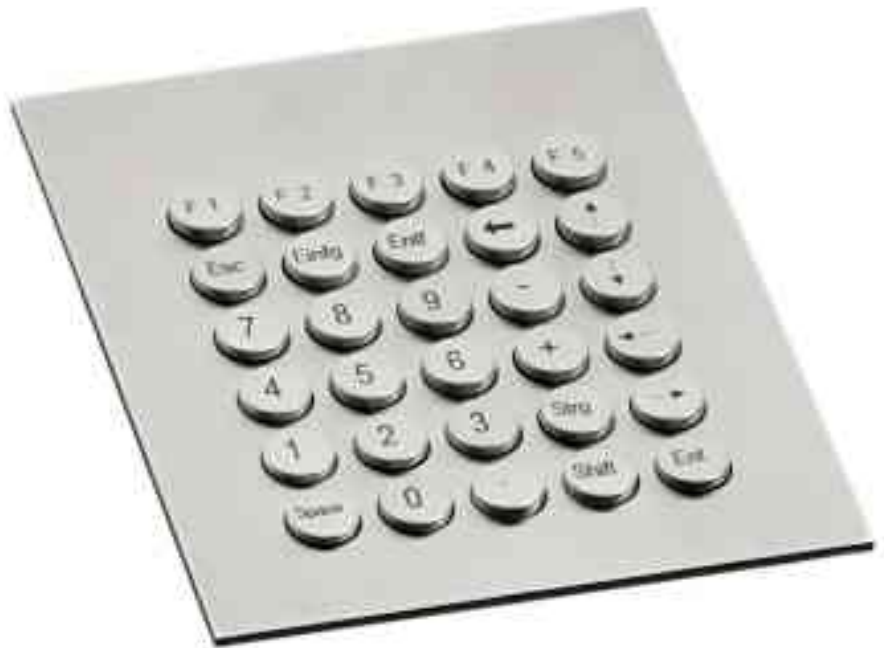

Description

Applications:

This keyboard has a wide range of uses in many fields due to its robust construction that is virtually indestructible. Such areas are points of information or ticketing machines.


Characteristics:

- The non removable and non inflammable key caps are made of high-grade steel. The front plate of 2.5 mm high-grade steel makes this keyboard particularly durable.
- This keyboard has 30 high-grade steel keys with a stroke of 3.5 mm. Therefore it is the first high-grade steel keyboard, that permits high-speed writing.

Interfaces:

- The keyboard has several connection types. The standard interface is [PS/2](#). The serial interface is available on demand.

The keyboard can be programmed and lasered to correspond to your needs. Just let us know what you need.

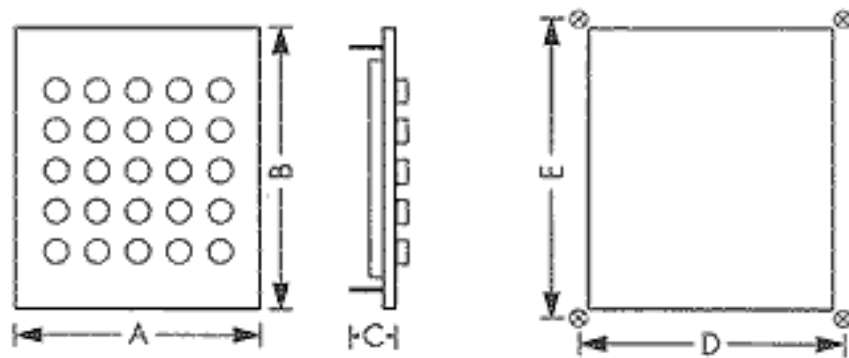**Tastaturmaße****A 135****B 170****C 20****Einbaumaße****D 162****E 127****Edelstahlfrontplatte 2,5 mm****Specification****Mechanical data**

Dimensions:	135 x 170 x 20 mm
Degree of Protection:	IP65
Housing:	Metal
Cable Length:	180 cm

Keys

Key Technology:	conductiv rubber
Number of Keys:	30
Keyboard Layout:	numpad
Operational Life:	10 mio. keystrokes min.
Actuation Force:	0,65 N
Stroke Travel:	3,25 ± 0,25 mm
Key Legend:	Laser

Electric Data


Interface:	PS/2
Operating Voltage:	5 V
Operating Current:	50 mA

Temperature


Operating Temperature:	from -20 °C to +60 °C
Storage Temperature:	from -40 °C to +70 °C

Order No.	Article	
KV1141	KVD-30-PS2-Ger	PS/2 interface
KV1195	KVD-30-PS2-US	PS/2 interface

Accessories

Order No.	Article	
ZK1301	KVS-30-PS/2-Kabel	PS/2 interface
ZK1029	COM 9255 	adapter PS/2 to AT

Links

Click!	Titel
	PI 035 - 05/03/2001 KVD Series Vandal-resistant high-grade steel keyboards for high-speed writing

sales@www.tastaturen.com Anrufen: (0 89) 89 43 99-0 Faxen: (0 89) 89 43 99-11