www.tastaturen.com®

KVD-86 Front-Plate

Vandal resistant stainless steel keyboard with integrated trackball as front-plate.



Description

Applications:


This keyboard has a wide range of uses in many feilds due to its robust construction that is virtually indestructible. Such areas are points of information or ticketing mashines.

Characteristics:

- This keyboard has 30 high-grade steel keys with a stroke of 3.5 mm.
 Therefore it is the first high-grade steel keyboard, that permits high-speed writing.
- The laser-etched key caps do not allow the legends to wear off, they
 cannot be pulled out and are not inflammable. The thick front plates of
 2.5 mm high-grade steel make these keyboards extremely durable and
 protects them from effects by force.

Characterististics of the Trackball:

The keyboard is fitted with a 38mm stainless steel trackball. This
trackball is IP65/NEMA4 waterproof and has a very long lifespan due to
its steel bearing shafts.

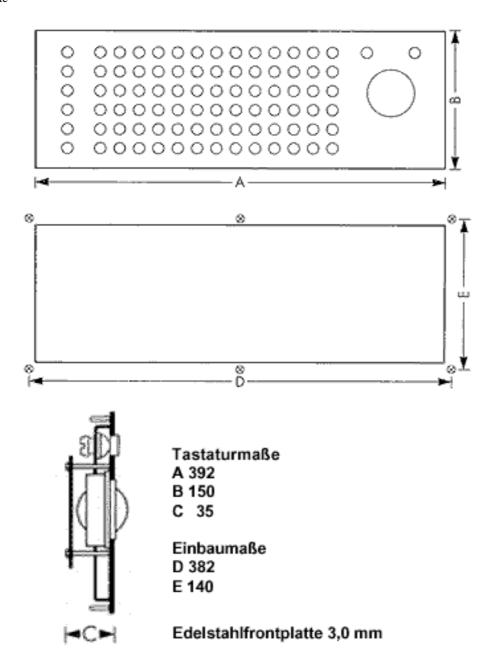

Specification

Mechanical data

Dimensions:

392 x 150 x 35 mm

Degree of Protection:

IP65

Housing:

Metal

Cable Length:

180 cm

Keys

Number of Keys:

86

Keyboard Layout:

German

Operational Life:

10 mio. keystrokes min.

Actuation Force:

0.65 N

Stroke Travel:

 $3,25 \pm 0,25 \text{ mm}$

Key Legend:

Laser

Electric Data

Interface:

PS/2

Operating Voltage:

5 V

Operating Current: 50 mA

Environment

Operating Temperature: from -20 °C to +60 °C Storage Temperature: from -40 °C to +70 °C

Order No.	Article		
deutsches Layout			
KV1142	KVD-86-PS2-Ger	PS/2 interface, german layout	
deutsches Layout			
KV1250	KVD-86-PS2-Nor	PS/2 interface, german layout	
KV1146	KVD-86-PS2-US	PS/2 interface, US layout	
KV1143	KVD-86-USB-Ger	USB interface, german layout	
KV1147	KVD-86-USB-US	USB interface, US layout	

Accessories

Order No.	Article	
ZK1029	COM 9255	adapter PS/2 to AT

Links

Click!	Titel
THE STATE OF	PI 035 - 05/03/2001 KVD Series Vandal-resistent high-grade steel keyboards for high-speed writing

sales@www.tastaturen.com Anrufen: (0 89) 89 43 99-0 Faxen: (0 89) 89 43 99-11