


KVS-Series Key Row

Stainless Steel Keyboard Row with 4 or 6 keys



Description

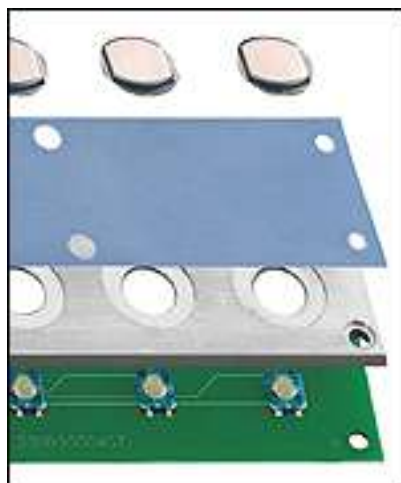

Specification

Application Areas:

Ideal for use in frontpanel systems, Point-of-Sales applications as well as for applications in rough environments.

Specials:

- good tactile feeling because of membrane keys (0,6 - 0,8 mm)
- with four or six keys available
- vandalresistant
- IP65 front
- wide range of applications
- five different colours for double caps

Mechanical data

Degree of Protection: IP65

Dimensions: 137 x 34 x 13,6 mm

Keys

Key Technology: short travel key

Number of Keys: 4/5/6

Stroke Force: $4,5 \pm N$

Stroke Travel: 0,1 mm

Electric Data

Interface:

Environment

Operating Temperature: from 0 °C to +55 °C

Storage Temperature: from -20 °C to +70 °C

Order Information

Order No.	Article	
KS2089	KVS-4-M	Matrix interface
KS2090	KVS-5-M	Matrix interface
KS2091	KVS-6-M	Matrix interface

sales@www.tastaturen.com Anrufen: (0 89) 89 43 99-0 Faxen: (0 89) 89 43 99-11