

KWD-Frontpanel version without integrated trackball or touchpad.

Frontpanel version with high degree of protection




Description

Applications:

This series can be used in many fields such as in info terminals, medicine, industry, etc..

Characteristics:

- The tactile feedback allow comfortable typing.
- Both AT and [PS/2](#) versions are available.
- The extremely flat mechanism and the rear-mounted studs enable the integration in existing housings.
- The silicone mat of the keyboard seals itself against water and dust.
- The keyboard layout is comparable to a laptop layout.
- The layout has the windows keys and integrated LEDs that inform the user of the status of Caps-, Scroll-, and NUM-lock.
- Further language layouts are available on demand.

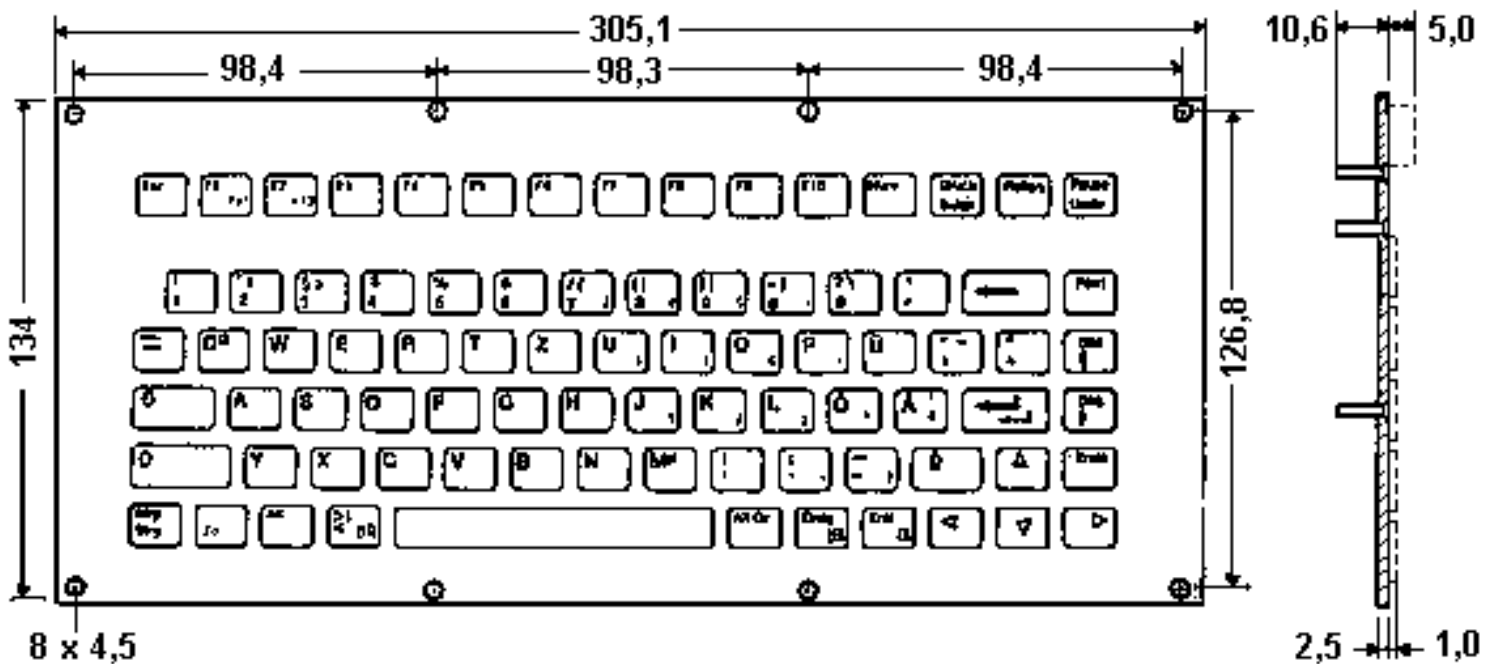

Specification

Mechanical data

Dimensions:

305 x 134 x 10 mm

Weight:

,350 kg

Housing:

Metal

Degree of Protection:

IP65

Color:

computer grey

Keys

Key Technology:

carbon contact

Number of Keys:

83

Keyboard Layout:

German

Operational Life:

1 mio. keystrokes min.

Actuation Force:

1,2 N

Stroke Travel:

1 mm

Electric Data

Interface:

AT & [PS/2](#)

Operating Voltage:

5 V

Operating Current:

20 mA

Environment

Operating Temperature:


from -20 °C to 60 °C

| Order No. | Article | |
|-----------|--------------------|-------------------------------|
| KM1053 | KWD-83-FP-PS/2-GER | PS/2 interface, german layout |
| KM1054 | KWD-83-FP-PS/2-US | PS/2 interface, US layout |

Accessories

| Order No. | Article | |
|-----------|--|---------------------|
| KK1177 | KWD-PS/2 | PS2 cable |
| KK1024 | KWD-AT | AT cable |
| ZK1289 | PS/2 Anschlusskabel Keyboard KWD-83/85 | Keyboard Cable PS/2 |

Links

| Click! | Titel |
|---|---|
|  | KWD-83/85 serie (IP65) with trackball or touchpad. The series of silicone keyboards as table-top, front-panel versions optionally available with a choice of touchpad or trackball as pointing devices. |