

TM-2-PS2




Easy to use industrial pointing device for mounting in frontplates



Description

Applications for example in test and inspection equipment, medical diagnostic, navigation or machine controls

-
- Mounting in frontplates like control panels
-
- cursor speed proportional to applied pressure
- Connection to Serial, [PS/2](#) mouse port or direct serial TTL levels possible
- Driversoftware for Windows, DOS and OS/2
Output Data Format: Microsoft and PS/2 two-button mouse

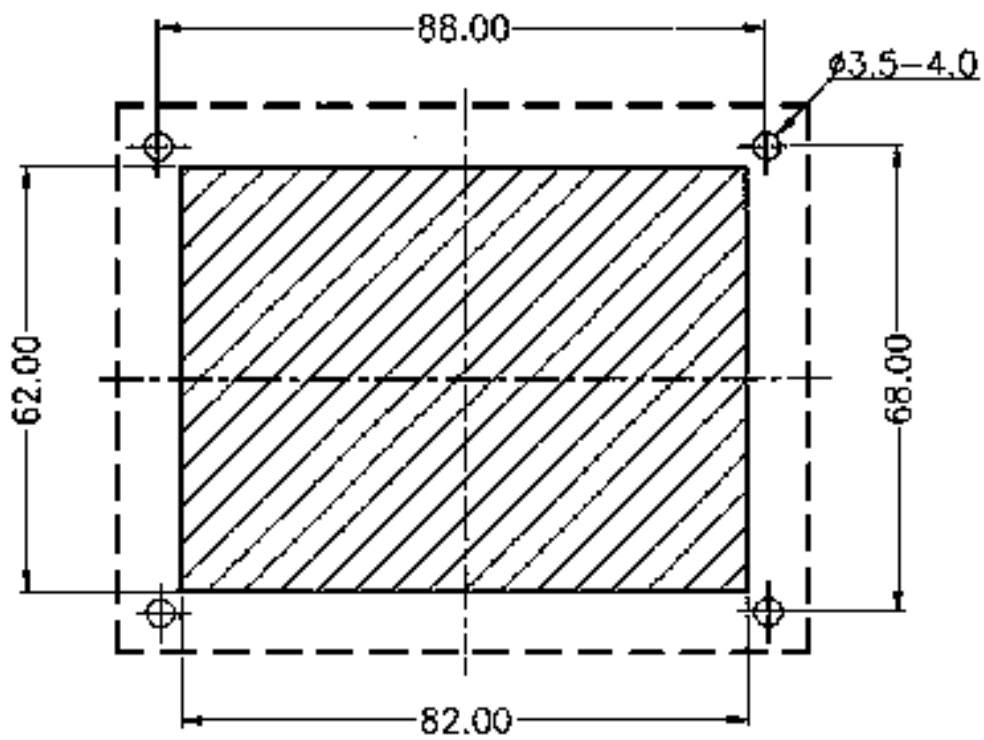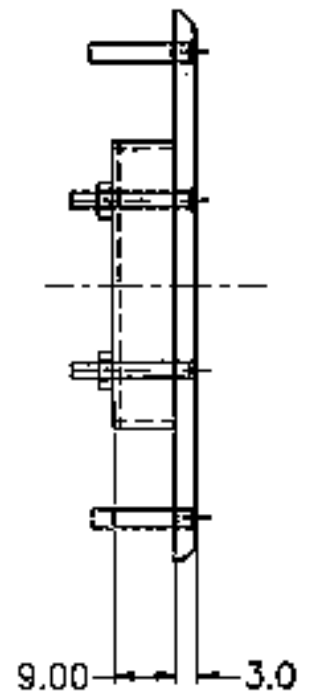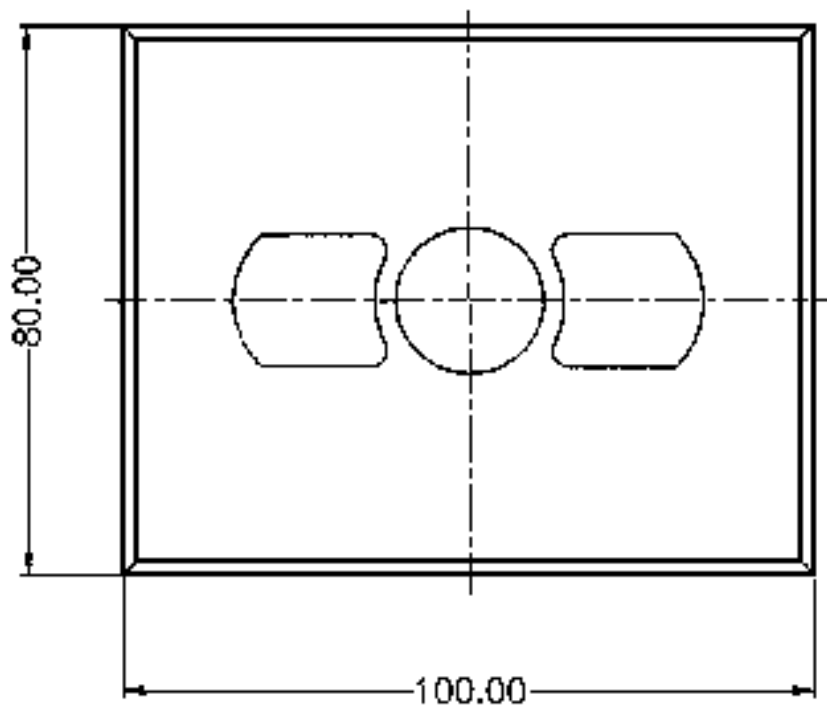

Specification**Mechanical data**

Dimensions: 100 x 80 x 20 mm
Housing: Metal
Degree of Protection: IP65
Color: computer grey
Cable Length: 180 cm

Keys

Number of Keys: 2
Operational Life: 5 mio. keystrokes min.

Electric Data

Interface: [PS/2](#) & 5 V
Operating Voltage: 5 V
Operating Current: < 6 mA

Temperature

Operating Temperature: from 0 °C to +70 °C
Storage Temperature: from -40 °C to +85 °C

Order No.	Article	
TM1013	TM-2-PS/2	PS/2 interface
TM1012	TM-2-Seriell	interface serial

sales@www.tastaturen.com Anrufen: (0 89) 89 43 99-0 Faxen: (0 89) 89 43 99-11